



Dornbracht

specification book

2020 / Spa Solutions

EXPORT

Valid from 01.04.2020

Export



List of contents

Spa Solutions – complete shower solutions with integrated water programs for your bathroom or spa.



Aquamoon^{ATT}

003 - 004



Horizontal Shower^{ATT}

021 - 024



Aquamoon

005 - 008



Comfort Shower^{ATT}

025 - 026



Rainmoon

009 - 012



eUnit Shower^{ATT}

027 - 028



Sensory Sky^{ATT}

013 - 014



Leg Shower^{ATT}

029 - 030



Vertical Shower^{ATT}

015 - 020



Foot Bath^{ATT}

031 - 032

Individualization

034 - 035

Smart Water for Smart Living



Smart Set Shower

037 - 040

Installation supervision and
maintenance contract

036



Smart Set Bath

041 - 046



Smart Set Basin

047 - 049

Models, programmes and technical modifications as well as errors are excepted.

Aquamoon^{ATT}

Michael Neumayr Design



The electronic variant of AQUAMOON^{ATT} is at the forefront of the product concept. The three flow modes (TEMPEST, AQUA CIRCLE and QUEEN'S COLLAR) are combined with different coloured light scenarios to provide an emotional water experience that dispenses new energy.


An invisibly integrated LED strip creates a soft light that is inspired by the effect of moonlight. In combination with the minimalist lines of the dome, AQUAMOON^{ATT} generates a unique effect of depth – the illusion of infinity.

Note

It is obligatory for technical planning, installation and initial commissioning to be accompanied by a certified system partner or by booking a Dornbracht service package.

Detailed product information, appropriate files, dimensioned drawings and 3D objects can be found online at www.dornbracht.com/professional.

41 265 979

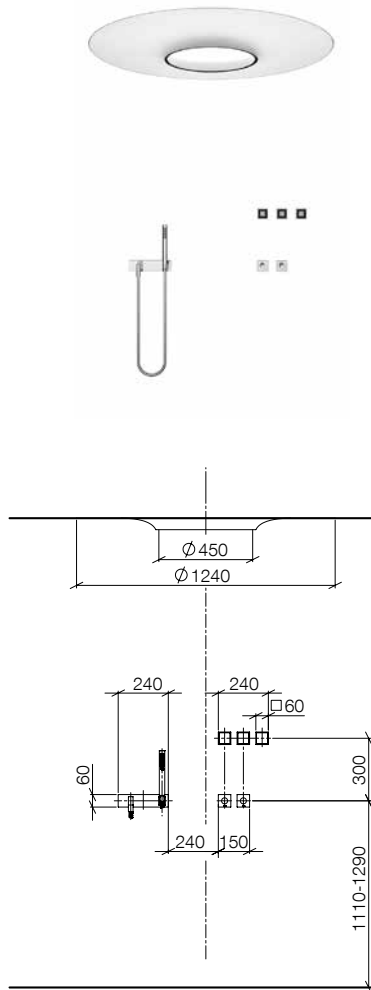

AQUAMOON^{ATT} Experience Shower

- exposed trim parts
- 1x rain panel for ceiling installation**
- Shower module with 3 different flow modes
- Aquacircle: circular rain curtain with 72 jets, max. 12 l/min
- Tempest: natural rain with 48 jets, max. 10 l/min
- Queen's Collar: rounded cascade, max. 25 l/min
- Indirect ambient lighting, RGBW LED light strip
- Matt white cover, RAL 9003
- with anti-scale system

1x hand shower set

- normal flow
- max. flow 8 l/min

3x eVALVE electronic valve for water temperature and volume adjustment

- automatic scald protection

1x electronic control elements (SMART TOOLS)

- 2x twist-action control elements with electronic control for temperature and volume, each 60 x 60 mm
- 3x display switch control elements with electronic control for rain modes, complete hand shower set, choreographies, light choreographer, ambient lighting, each 60 x 60 mm

1x fragrance system

Rain panel cover for adaptation to ceiling colour available in all RAL colours, price and delivery time on request

polished chrome	41 265 979-00
platinum matt	41 265 979-06



Required miscellaneous

AQUAMOON^{ATT} Experience Shower

35 265 970 90

- concealed rough parts

1x rain panel ceiling installation enclosure

- 2x male thread 1/2" connection, (cold / warm), DN 20
- 1x concealed rough parts for eVALVE
- 1/2" female connector (hot/cold), DN 15

1x concealed rough parts for electronic control elements (SMART TOOLS)

- 5x concealed box for pre-wall installation mounting
- min. recess depth for SMART TOOLS, 139 - 164 mm, hole diameter 56 mm

Required miscellaneous

AQUAMOON^{ATT} / SENSORY SKY^{ATT} Installation support

IS-0001

- Planning advice
- Concealed rough parts support
- Exposed trim parts support
- Commissioning

ATTENTION: No discount is given on this item.

It is obligatory for technical planning, installation and initial commissioning to be accompanied by a certified system partner or by booking a Dornbracht service package

Recommended miscellaneous

AQUAMOON^{ATT} Miscellaneous package

12 330 970 90

- Embrace: rounded cascade, max. 60 l/min

2x eVALVE electronic valve for water temperature and volume adjustment

Recommended miscellaneous

AQUAMOON^{ATT} / SENSORY SKY^{ATT} Maintenance Service

MS-0001

- regular maintenance by qualified personnel
- updating of the software including introduction to new features
- Increase the lifetime of your system (value preservation)
- **the indicated price is per year. For more information, see the corresponding maintenance contract**

ATTENTION: No discount is given on this item.

dornbracht.com/aquamoon

Aquamoon

Michael Neumayr Design



AQUAMOON brings a new dimension to the shower experience.



Three unprecedented flow modes and the subtle use of light create an emotional experience for body and mind. The daily shower is transformed into the ultimate safe haven, dispensing new life-force energy through personal moments of deep relaxation.

Perfectly embedded into the ceiling and virtually invisible, AQUAMOON is a unique interior design solution that can be integrated into every architectural concept.

Use xTools to combine all the flow modes as desired, and create an adaptable and individual water experience.

Detailed product information, appropriate files, dimensioned drawings and 3D objects can be found online at www.dornbracht.com/professional.

41 600 740

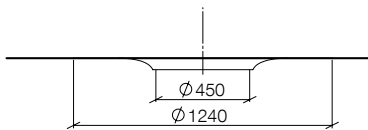

AQUAMOON Experience Shower

- exposed trim parts
- 1x rain panel for ceiling installation**
- Shower module with 3 different flow modes
- Aquacircle: circular rain curtain with 72 jets, max. 12 l/min
- Tempest: natural rain with 48 jets, max. 10 l/min
- Queen's Collar: rounded cascade, max. 23 l/min
- Indirect ambient lighting, warm white LED light strip
- Matt white cover, RAL 9003
- with anti-scale system

1x hand shower set

- normal flow
- max. flow 7,6 l/min

1 x xTool thermostat module with 4 valves

- temperature control handle with safety limit stop at 38°C

Rain panel cover for adaptation to ceiling colour available in all RAL colours, price and delivery time on request

polished chrome	41 600 740-00
platinum matt	41 600 740-06



Required miscellaneous

AQUAMOON Experience Shower

35 600 970 90

- concealed rough parts
- 1x rain panel ceiling installation enclosure**
- 3 x connector, 3/4" male (mixed water), DN 20
- 1 x connector, 110-230 V AC power supply
- 1 x xTool concealed thermostat module with 3 valves**
- 2x female thread 3/4" connections
- 1 x concealed valve, 1/2" clockwise closing**
- female thread 1/2" connection
- 1x concealed wall elbow**

Recommended miscellaneous

AQUAMOON / RAINMOON Installation support

IS-0007

- Planning advice
- Concealed rough parts support
- Exposed trim parts support
- Commissioning

ATTENTION: No discount is given on this item.

Recommended miscellaneous

AQUAMOON / RAINMOON Maintenance Service


MS-0007

- regular maintenance by qualified personnel
- Increase the lifetime of your system (value preservation)
- **the indicated price is per year. For more information, see the corresponding maintenance contract**

ATTENTION: No discount is given on this item.

dornbracht.com/aquamoon

41 600 782

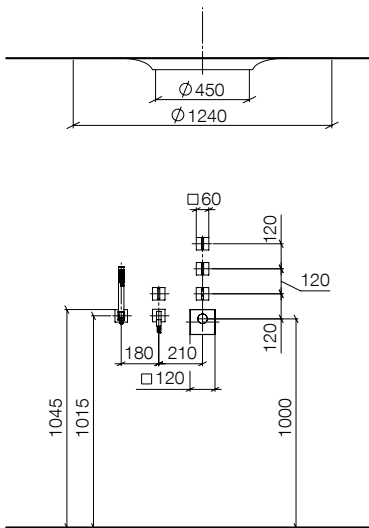

AQUAMOON Experience Shower

- exposed trim parts
- 1x rain panel for ceiling installation**
- Shower module with 3 different flow modes
- Aquacircle: circular rain curtain with 72 jets, max. 12 l/min
- Tempest: natural rain with 48 jets, max. 10 l/min
- Queen's Collar: rounded cascade, max. 23 l/min
- Indirect ambient lighting, warm white LED light strip
- Matt white cover, RAL 9003
- with anti-scale system

1x hand shower set

- normal flow
- max. flow 7,6 l/min

1 x xTool thermostat module with 4 valves

- temperature control handle with safety limit stop at 38°C

Rain panel cover for adaptation to ceiling colour available in all RAL colours, price and delivery time on request

polished chrome	41 600 782-00
platinum matt	41 600 782-06



Required miscellaneous

AQUAMOON Experience Shower

35 600 970 90

- concealed rough parts
- 1x rain panel ceiling installation enclosure**
- 3 x connector, 3/4" male (mixed water), DN 20
- 1 x connector, 110-230 V AC power supply
- 1 x xTool concealed thermostat module with 3 valves**
- 2x female thread 3/4" connections
- 1 x concealed valve, 1/2" clockwise closing**
- female thread 1/2" connection
- 1x concealed wall elbow**

Recommended miscellaneous

AQUAMOON / RAINMOON Installation support

IS-0007

- Planning advice
- Concealed rough parts support
- Exposed trim parts support
- Commissioning

ATTENTION: No discount is given on this item.

Recommended miscellaneous

AQUAMOON / RAINMOON Maintenance Service

MS-0007

- regular maintenance by qualified personnel
- Increase the lifetime of your system (value preservation)
- **the indicated price is per year. For more information, see the corresponding maintenance contract**

ATTENTION: No discount is given on this item.

dornbracht.com/aquamoon

Rainmoon

Michael Neumayr Design





The natural interplay of water and light that is possible with RAINMOON is an emotional experience for body and mind. Two new, unprecedented flow modes produce a unique sensation of rain. The daily shower is transformed into the ultimate safe haven, dispensing new life-force energy through personal moments of deep relaxation.

Perfectly embedded into the ceiling and virtually invisible, RAINMOON is a unique interior design solution that can be integrated into every architectural concept.

A three-function thermostat makes it easy to control the flow modes, as well as the complete hand shower set.

Detailed product information, appropriate files, dimensioned drawings and 3D objects can be found online at www.dornbracht.com/professional.

41 600 970

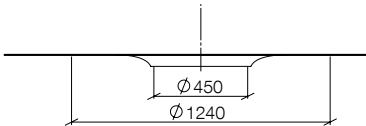

1200

RAINMOON Experience Shower

- exposed trim parts
- 1x rain panel for ceiling installation**
 - Rain panel with 2 different spray modes
 - Aquacircle: circular rain curtain with 72 jets, max. 6,8 l/min
 - Tempest: natural rain with 48 jets, max. 5 l/min
 - Indirect ambient lighting, warm white LED light strip
 - Matt white cover, RAL 9003
 - with anti-scale system

1x hand shower set

- normal flow
- max. flow 6,8 l/min

1 x concealed thermostat with three-function volume control

- temperature control handle with safety limit stop at 38°C

Rain panel cover for adaptation to ceiling colour available in all RAL colours, price and delivery time on request

polished chrome	41 600 970-00
platinum matt	41 600 970-06



Required miscellaneous

RAINMOON Experience Shower

35 600 979 90

- concealed rough parts
- 1x rain panel ceiling installation enclosure**
 - 2 x connector, 3/4" male (mixed water), DN 20
 - 1 x connector, 110-230 V AC power supply

1 x concealed thermostat with pre-seal

- 3x outlet G 1/2"
- 2x inlet G 1/2"

1x concealed wall elbow

Recommended miscellaneous

AQUAMOON / RAINMOON Installation support

IS-0007

- Planning advice
- Concealed rough parts support
- Exposed trim parts support
- Commissioning

ATTENTION: No discount is given on this item.

Recommended miscellaneous

AQUAMOON / RAINMOON Maintenance Service


MS-0007

- regular maintenance by qualified personnel
- Increase the lifetime of your system (value preservation)
- **the indicated price is per year. For more information, see the corresponding maintenance contract**

ATTENTION: No discount is given on this item.

dornbracht.com/rainmoon

41 600 979

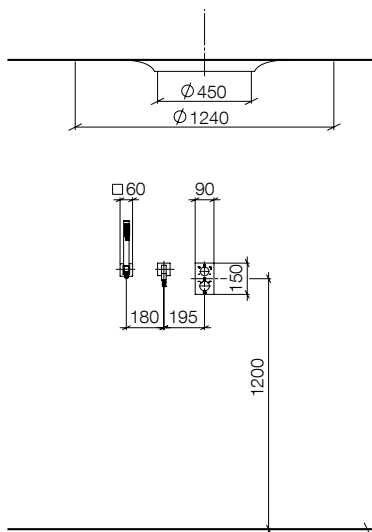

RAINMOON Experience Shower

- exposed trim parts
- 1x rain panel for ceiling installation**
- Rain panel with 2 different spray modes
- Aquacircle: circular rain curtain with 72 jets, max. 6,8 l/min
- Tempest: natural rain with 48 jets, max. 5 l/min
- Indirect ambient lighting, warm white LED light strip
- Matt white cover, RAL 9003
- with anti-scale system

1x hand shower set

- normal flow
- max. flow 6,8 l/min

1 x concealed thermostat with three-function volume control

- temperature control handle with safety limit stop at 38°C

Rain panel cover for adaptation to ceiling colour available in all RAL colours, price and delivery time on request

polished chrome	41 600 979-00
platinum matt	41 600 979-06



Required miscellaneous

RAINMOON Experience Shower

35 600 979 90

- concealed rough parts
- 1x rain panel ceiling installation enclosure**
- 2 x connector, 3/4" male (mixed water), DN 20
- 1 x connector, 110-230 V AC power supply

1 x concealed thermostat with pre-seal

- 3x outlet G 1/2"
- 2x inlet G 1/2"

1x concealed wall elbow

Recommended miscellaneous

AQUAMOON / RAINMOON Installation support

IS-0007

- Planning advice
- Concealed rough parts support
- Exposed trim parts support
- Commissioning

ATTENTION: No discount is given on this item.

Recommended miscellaneous

AQUAMOON / RAINMOON Maintenance Service

MS-0007

- regular maintenance by qualified personnel
- Increase the lifetime of your system (value preservation)
- **the indicated price is per year. For more information, see the corresponding maintenance contract**

ATTENTION: No discount is given on this item.

dornbracht.com/rainmoon

Sensory Sky^{ATT}

Sieger Design




Just like being in the open air. SENSORY SKY^{ATT} turns showering into a unique experience that awakens all your senses. Different types of rain, mist, light and fragrances complement each other in complex Signature Treatments which are inspired by weather phenomena and the moods of nature. Control is simple and convenient thanks to the digital SMART TOOLS from Dornbracht.

Note

It is obligatory for technical planning, installation and initial commissioning to be accompanied by a certified system partner or by booking a Dornbracht service package.

Detailed product information, appropriate files, dimensioned drawings and 3D objects can be found online at www.dornbracht.com/professional.

41 260 979

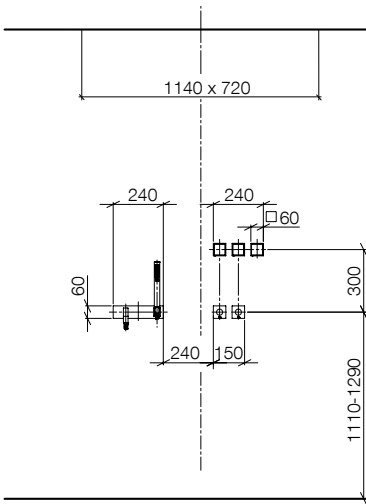

SENSORY SKY^{ATT} Luxury Shower

- exposed trim parts

1x rain panel for ceiling installation

- head spray 200 x 120 mm, 68 jets
- body spray 360 x 280mm, 142 nozzles
- rain curtain 720 x 540mm, 124 nozzles
- cold-water mist nozzle 40 x 40 mm, 9 jets
- shower zone lighting, 4 x RGBW LED spots
- ambient lighting, 4 x RGB LED light strips

1x complete hand shower set with cover plate

- normal flow
- max. flow 8 l/min

4x eVALVE electronic valve for water temperature and volume adjustment

- automatic scald protection

1x electronic control elements (SMART TOOLS)

- 2x twist-action control elements with electronic control for temperature and volume, each 60 x 60 mm
- 3x display switch control elements with electronic control for rain modes, complete hand shower set, cold-water mist, choreographies, fragrance and light, each 60 x 60 mm

1x fragrance system

Brightly polished stainless steel / chrome

41 260 979-88

Brushed stainless steel / platinum matt

41 260 979-89



Required miscellaneous

SENSORY SKY^{ATT} Luxury Shower

35 260 970 90

- concealed rough parts

1x rain panel ceiling installation enclosure

- 2x supply connection 1/2" female thread (cold/hot), DN 15
- 1x concealed rough parts for eVALVE
- 1/2" female connector (hot/cold), DN 15

1x concealed rough parts for electronic control elements (SMART TOOLS)

- 5x concealed box for pre-wall installation mounting

Required miscellaneous

AQUAMOON^{ATT} / SENSORY SKY^{ATT} Installation support

IS-0001

- Planning advice
- Concealed rough parts support
- Exposed trim parts support
- Commissioning

ATTENTION: No discount is given on this item.

It is obligatory for technical planning, installation and initial commissioning to be accompanied by a certified system partner or by booking a Dornbracht service package

Recommended miscellaneous

AQUAMOON^{ATT} / SENSORY SKY^{ATT} Maintenance Service

MS-0001

- regular maintenance by qualified personnel
- updating of the software including introduction to new features
- Increase the lifetime of your system (value preservation)
- **the indicated price is per year. For more information, see the corresponding maintenance contract**

ATTENTION: No discount is given on this item.

dornbracht.com/sensory-sky

Vertical Shower^{ATT}

Sieger Design





VERTICAL SHOWER^{ATT} combines special outlet points with different jet types. JUST RAIN envelops the body with large, pearl-like drops. There are two options available for the neck and back area. Thanks to aquapressure, WATER CURVE, WATER FAN vertical and WATER FAN horizontal deliver an especially intense massage to the entire neck and back area. Tension is targeted and melts away, stimulating the metabolism and allowing energy to flow freely once again. Combine with WATER SHEET and WATER BARS for that natural feeling. A clear, broad gush of water falls from the WATER SHEET onto the shoulders. The back is stimulated by two WATER BARS. As with HORIZONTAL SHOWER^{ATT}, SMART TOOLS can be used to choose between the three Signature Treatments of BALANCING, ENERGIZING and DE-STRESSING.

Note

It is obligatory for technical planning, installation and initial commissioning to be accompanied by a certified system partner or by booking a Dornbracht service package.

Detailed product information, appropriate files, dimensioned drawings and 3D objects can be found online at www.dornbracht.com/professional.

41 290 979

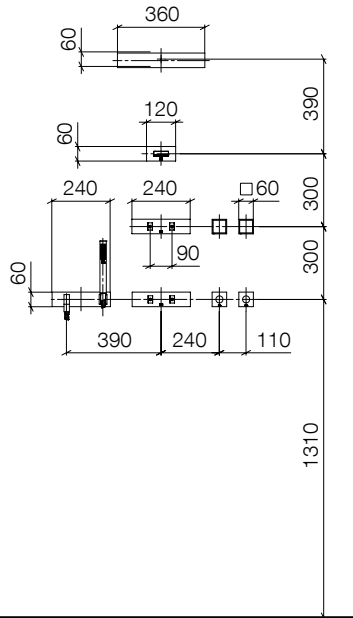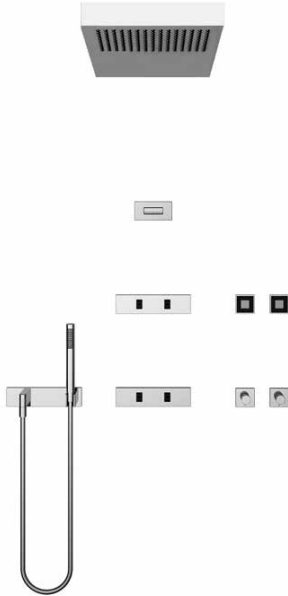

VERTICAL SHOWER^{ATT} Massage Shower

- exposed trim parts
- 1x JUST RAIN rain shower with wall fixing**
 - rain flow
 - max. flow 16 l/min
- 1x WATER CURVE concealed body spray**
 - forceful flat water jet
 - horizontal water jet
 - max. flow 9 l/min
- 1x WATER FAN vertical concealed body spray**
 - forceful flat water jet
 - vertical water jet
 - max. flow 9 l/min
- 1x WATER FAN horizontal concealed body spray**
 - forceful flat water jet
 - horizontal water jet
 - max. flow 9 l/min
- 1x complete hand shower set with cover plate**
 - normal flow
 - max. flow 8 l/min
- 5x eVALVE electronic valve for water temperature and volume adjustment**
 - automatic scald protection
- 1x electronic control elements (SMART TOOLS)**
 - 2x twist-action control elements with electronic control for temperature and volume, each 60 x 60 mm
 - 2 x display switch control elements with electronic control for water outlet points and scenarios, each 60 x 60 mm

Polished stainless steel / chrome	41 290 979-83
Brushed stainless steel / platinum matt	41 290 979-89



Required miscellaneous

VERTICAL SHOWER^{ATT} Massage Shower

35 290 970 90

- concealed rough parts
- 5x concealed rough parts for eVALVE**
- 1x concealed rough parts for electronic control elements (SMART TOOLS)**
 - 4x concealed box for pre-wall installation mounting
- 2x xGRID installation tracks incl. connection kit**

Required miscellaneous

HORIZONTAL / VERTICAL / COMFORT SHOWER^{ATT} Installation support

IS-0002

- Planning advice
- Concealed rough parts support
- Exposed trim parts support
- Commissioning

ATTENTION: No discount is given on this item.

It is obligatory for technical planning, installation and initial commissioning to be accompanied by a certified system partner or by booking a Dornbracht service package

Recommended miscellaneous



HORIZONTAL / VERTICAL / COMFORT SHOWER^{ATT} Maintenance Service

MS-0002

- regular maintenance by qualified personnel
- updating of the software including introduction to new features
- Increase the lifetime of your system (value preservation)
- **the indicated price is per year. For more information, see the corresponding maintenance contract**

ATTENTION: No discount is given on this item.

dornbracht.com/vertical-shower

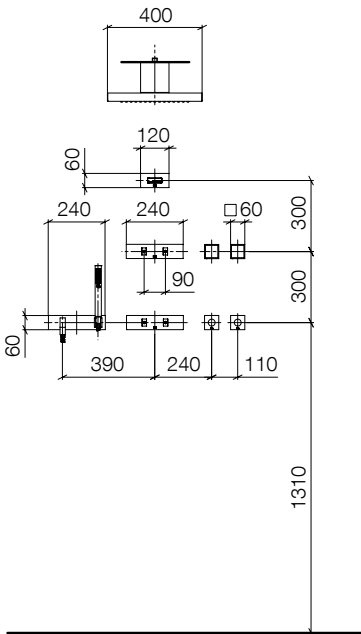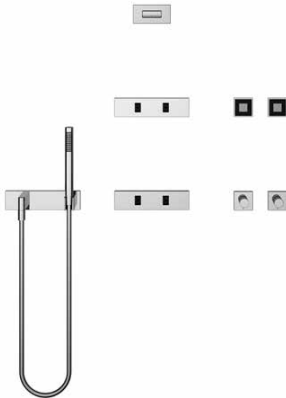

VERTICAL SHOWER^{ATT} Massage Shower

- exposed trim parts
- 1x JUST RAIN rain shower with ceiling fixing**
 - rain flow
 - max. flow 16 l/min
- 1x WATER CURVE concealed body spray**
 - forceful flat water jet
 - horizontal water jet
 - max. flow 9 l/min
- 1x WATER FAN vertical concealed body spray**
 - forceful flat water jet
 - vertical water jet
 - max. flow 9 l/min
- 1x WATER FAN horizontal concealed body spray**
 - forceful flat water jet
 - horizontal water jet
 - max. flow 9 l/min
- 1x complete hand shower set with cover plate**
 - normal flow
 - max. flow 8 l/min
- 5x eVALVE electronic valve for water temperature and volume adjustment**
 - automatic scald protection
- 1x electronic control elements (SMART TOOLS)**
 - 2x twist-action control elements with electronic control for temperature and volume, each 60 x 60 mm
 - 2 x display switch control elements with electronic control for water outlet points and scenarios, each 60 x 60 mm

Polished stainless steel / chrome	41 291 979-83
Brushed stainless steel / platinum matt	41 291 979-89

Required miscellaneous



VERTICAL SHOWER^{ATT} Massage Shower 35 291 970 90

- concealed rough parts
- 5x concealed rough parts for eVALVE**
- 1x concealed rough parts for electronic control elements (SMART TOOLS)**
 - 4x concealed box for pre-wall installation mounting
- 3x xGRID installation tracks incl. connection kit**



Required miscellaneous

HORIZONTAL / VERTICAL / COMFORT SHOWER^{ATT} Installation support IS-0002

- Planning advice
 - Concealed rough parts support
 - Exposed trim parts support
 - Commissioning
- ATTENTION: No discount is given on this item.**
- It is obligatory for technical planning, installation and initial commissioning to be accompanied by a certified system partner or by booking a Dornbracht service package**

Recommended miscellaneous

HORIZONTAL / VERTICAL / COMFORT SHOWER^{ATT} Maintenance Service MS-0002

- regular maintenance by qualified personnel
 - updating of the software including introduction to new features
 - Increase the lifetime of your system (value preservation)
 - **the indicated price is per year. For more information, see the corresponding maintenance contract**
- ATTENTION: No discount is given on this item.**


dornbracht.com/vertical-shower

41 282 979

VERTICAL SHOWER^{ATT} Massage Shower

- exposed trim parts
- 1x JUST RAIN rain shower with wall fixing**
 - rain flow
 - max. flow 16 l/min
- 1x WATER SHEET 1/2" cascade spout for wall mounting**
 - cascade
 - max. flow 16 l/min
- 2x WATER BAR concealed body spray**
 - max. flow 8 l/min
- 1x complete hand shower set with cover plate**
 - normal flow
 - max. flow 8 l/min
- 5x eVALVE electronic valve for water temperature and volume adjustment**
 - automatic scald protection
- 1x electronic control elements (SMART TOOLS)**
 - 2x twist-action control elements with electronic control for temperature and volume, each 60 x 60 mm
 - 2 x display switch control elements with electronic control for water outlet points and scenarios, each 60 x 60 mm

Polished stainless steel / chrome	41 282 979-83
Brushed stainless steel / platinum matt	41 282 979-89

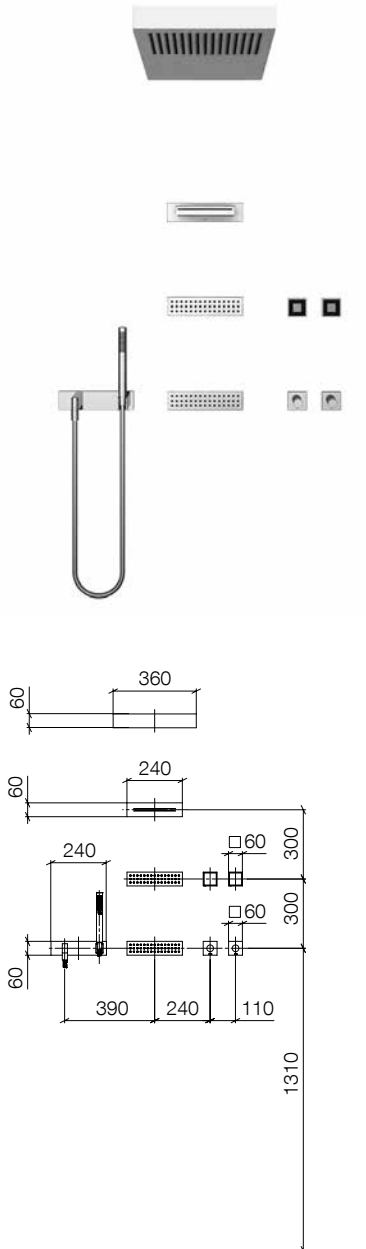

Required miscellaneous



VERTICAL SHOWER^{ATT} Massage Shower

35 282 970 90

- concealed rough parts
- 5x concealed rough parts for eVALVE**
- 1x concealed rough parts for electronic control elements (SMART TOOLS)**
 - 4x concealed box for pre-wall installation mounting
- 4x xGRID installation tracks incl. connection kit**

Required miscellaneous

HORIZONTAL / VERTICAL / COMFORT SHOWER^{ATT} Installation support

IS-0002

- Planning advice
- Concealed rough parts support
- Exposed trim parts support
- Commissioning

ATTENTION: No discount is given on this item.

It is obligatory for technical planning, installation and initial commissioning to be accompanied by a certified system partner or by booking a Dornbracht service package

Recommended miscellaneous



HORIZONTAL / VERTICAL / COMFORT SHOWER^{ATT} Maintenance Service

MS-0002

- regular maintenance by qualified personnel
- updating of the software including introduction to new features
- Increase the lifetime of your system (value preservation)
- **the indicated price is per year. For more information, see the corresponding maintenance contract**

ATTENTION: No discount is given on this item.

dornbracht.com/vertical-shower

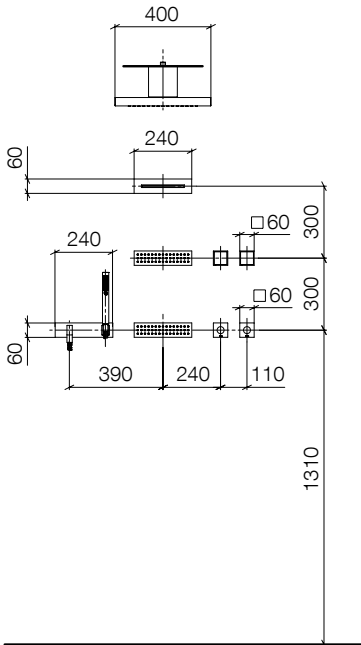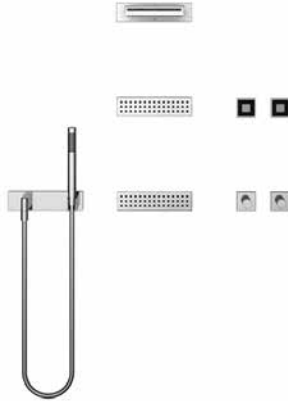

VERTICAL SHOWER^{ATT} Massage Shower

- exposed trim parts
- 1x JUST RAIN rain shower with ceiling fixing**
 - rain flow
 - max. flow 16 l/min
- 1x WATER SHEET 1/2" cascade spout for wall mounting**
 - cascade
 - max. flow 16 l/min
- 2x WATER BAR concealed body spray**
 - max. flow 8 l/min
- 1x complete hand shower set with cover plate**
 - normal flow
 - max. flow 8 l/min
- 5x eVALVE electronic valve for water temperature and volume adjustment**
 - automatic scald protection
- 1x electronic control elements (SMART TOOLS)**
 - 2x twist-action control elements with electronic control for temperature and volume, each 60 x 60 mm
 - 2 x display switch control elements with electronic control for water outlet points and scenarios, each 60 x 60 mm

Polished stainless steel / chrome	41 283 979-83
Brushed stainless steel / platinum matt	41 283 979-89

Required miscellaneous

VERTICAL SHOWER^{ATT} Massage Shower

35 283 970 90

- concealed rough parts
- 5x concealed rough parts for eVALVE**
- 1x concealed rough parts for electronic control elements (SMART TOOLS)**
 - 4x concealed box for pre-wall installation mounting
- 3x xGRID installation tracks incl. connection kit**



Required miscellaneous

HORIZONTAL / VERTICAL / COMFORT SHOWER^{ATT} Installation support

IS-0002

- Planning advice
- Concealed rough parts support
- Exposed trim parts support
- Commissioning

ATTENTION: No discount is given on this item.
It is obligatory for technical planning, installation and initial commissioning to be accompanied by a certified system partner or by booking a Dornbracht service package

Recommended miscellaneous

HORIZONTAL / VERTICAL / COMFORT SHOWER^{ATT} Maintenance Service

MS-0002

- regular maintenance by qualified personnel
 - updating of the software including introduction to new features
 - Increase the lifetime of your system (value preservation)
 - **the indicated price is per year. For more information, see the corresponding maintenance contract**
- ATTENTION: No discount is given on this item.**

dornbracht.com/vertical-shower

Horizontal Shower^{ATT}

Sieger Design




HORIZONTAL SHOWER^{ATT} provides, for the first time, a reclining shower experience. Six WATER BARS recessed above a reclining area and an electronic control element (SMART TOOLS) make up the application. Three pre-programmed Signature Treatments allow selection of BALANCING, ENERGIZING or DE-STRESSING effects.

Note

It is obligatory for technical planning, installation and initial commissioning to be accompanied by a certified system partner or by booking a Dornbracht service package.

Detailed product information, appropriate files, dimensioned drawings and 3D objects can be found online at www.dornbracht.com/professional.

41 287 979

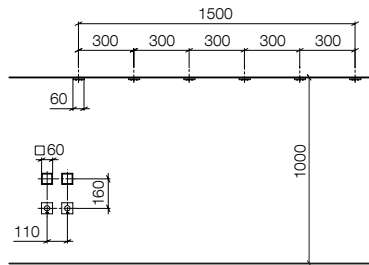

HORIZONTAL SHOWER^{ATT} Massage Shower

- exposed trim parts

6x WATER BAR concealed body spray

- rain flow
- max. flow 8 l/min

6x eVALVE electronic valve for water temperature and volume adjustment

- automatic scald protection

1x electronic control elements (SMART TOOLS)

- 2 x display switch control elements with electronic control for water outlet points and scenarios, each 60 x 60 mm
- 2x twist-action control elements with electronic control for temperature and volume, each 60 x 60 mm

polished chrome	41 287 979-00
platinum matt	41 287 979-06

Required miscellaneous



HORIZONTAL SHOWER^{ATT} Massage Shower

35 287 970 90

- concealed rough parts

6x concealed rough parts for eVALVE

1x concealed rough parts for electronic control elements (SMART TOOLS)

- 4x concealed box for pre-wall installation mounting

2x xGRID installation tracks incl. connection kit

Required miscellaneous

HORIZONTAL / VERTICAL / COMFORT SHOWER^{ATT} Installation support

IS-0002

- Planning advice
- Concealed rough parts support
- Exposed trim parts support
- Commissioning

ATTENTION: No discount is given on this item.

It is obligatory for technical planning, installation and initial commissioning to be accompanied by a certified system partner or by booking a Dornbracht service package

Recommended miscellaneous


HORIZONTAL / VERTICAL / COMFORT SHOWER^{ATT} Maintenance Service

MS-0002

- regular maintenance by qualified personnel
- updating of the software including introduction to new features
- Increase the lifetime of your system (value preservation)
- **the indicated price is per year. For more information, see the corresponding maintenance contract**

ATTENTION: No discount is given on this item.

dornbracht.com/horizontal-shower

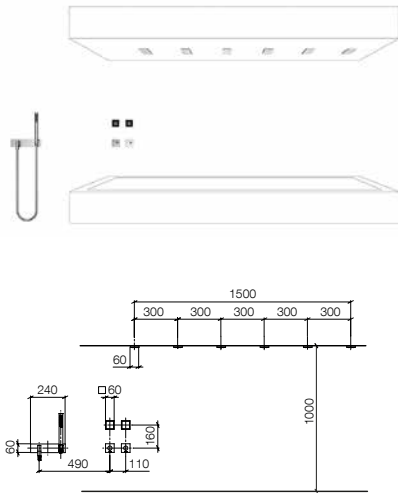**HORIZONTAL SHOWER^{ATT} Massage Shower**

- exposed trim parts

6x WATER BAR concealed body spray

- rain flow
- max. flow 8 l/min

1x complete hand shower set with cover plate

- normal flow
- max. flow 8 l/min

7x eVALVE electronic valve for water temperature and volume adjustment

- automatic scald protection

1x electronic control elements (SMART TOOLS)

- 2x twist-action control elements with electronic control for temperature and volume, each 60 x 60 mm
- 2 x display switch control elements with electronic control for water outlet points and scenarios, each 60 x 60 mm


polished chrome

41 288 979-00

platinum matt

41 288 979-06

Required miscellaneous

**HORIZONTAL SHOWER^{ATT} Massage Shower****35 288 970 90**

- concealed rough parts

7x eVALVE electronic valve for water temperature and volume adjustment**1x concealed rough parts for electronic control elements (SMART TOOLS)**

- 4x concealed box for pre-wall installation mounting

2x xGRID installation tracks incl. connection kit

Required miscellaneous

HORIZONTAL / VERTICAL / COMFORT SHOWER^{ATT} Installation support**IS-0002**

- Planning advice
- Concealed rough parts support
- Exposed trim parts support
- Commissioning

ATTENTION: No discount is given on this item.

It is obligatory for technical planning, installation and initial commissioning to be accompanied by a certified system partner or by booking a Dornbracht service package

Recommended miscellaneous

HORIZONTAL / VERTICAL / COMFORT SHOWER^{ATT} Maintenance Service**MS-0002**

- regular maintenance by qualified personnel
- updating of the software including introduction to new features
- Increase the lifetime of your system (value preservation)
- **the indicated price is per year. For more information, see the corresponding maintenance contract**

ATTENTION: No discount is given on this item.dornbracht.com/horizontal-shower

Comfort Shower^{ATT}

Sieger Design





COMFORT SHOWER^{ATT} from Dornbracht offers maximum relaxation, because it lets you shower while sitting down. The COMFORT SHOWER^{ATT} is also a particularly user-friendly and convenient way to enjoy hydro-applications such as Kneipp showers, or peeling. An optional addition to the seated shower is the LEG SHOWER^{ATT} – a shower for your legs that summons cold or alternating hot and cold bursts of water at the touch of a button.

Note

It is obligatory for technical planning, installation and initial commissioning to be accompanied by a certified system partner or by booking a Dornbracht service package.

Detailed product information, appropriate files, dimensioned drawings and 3D objects can be found online at www.dornbracht.com/professional.

41 321 979

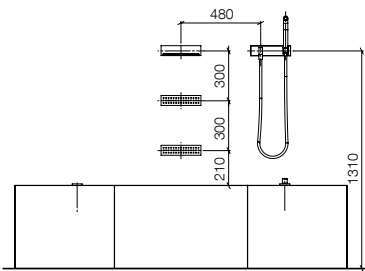

COMFORT SHOWER^{ATT} Flexible Wellness Shower

- exposed trim parts
- 1x BIG RAIN rain panel for ceiling or ceiling substructure installation**
 - head spray 200 x 160mm, 99 nozzles
 - max. flow 16 l/min
- 1x WATER FALL with PEARL STREAM**
 - cascade
 - jet regulator with 36 single jets 216 x 10mm
 - max. flow 12 l/min
- 2x WATER BAR concealed body spray**
 - rain flow
 - max. flow 8 l/min
- 1x affusion pipe with cover plate**
 - laminar flow
 - max. flow 8 l/min
- 6x eVALVE electronic valve for water temperature and volume adjustment**
 - automatic scald protection
- 1x electronic control elements (SMART TOOLS)**
 - 2x twist-action control elements with electronic control for temperature and volume, each 60 x 60 mm
 - 2 x display switch control elements with electronic control for water outlet points and scenarios, each 60 x 60 mm

Polished stainless steel / chrome	41 321 979-83
Brushed stainless steel / platinum matt	41 321 979-89

Required miscellaneous



COMFORT SHOWER^{ATT} Flexible Wellness Shower **35 321 970 90**

- concealed rough parts
- 4x concealed rough parts for eVALVE**
- 1x concealed rough parts for electronic control elements (SMART TOOLS)**
 - 4x concealed box for pre-wall installation mounting
- 2x xGRID installation tracks incl. connection kit**

Required miscellaneous

HORIZONTAL / VERTICAL / COMFORT SHOWER^{ATT} Installation support **IS-0002**

ATTENTION: No discount is given on this item.

It is obligatory for technical planning, installation and initial commissioning to be accompanied by a certified system partner or by booking a Dornbracht service package

Recommended miscellaneous

HORIZONTAL / VERTICAL / COMFORT SHOWER^{ATT} Maintenance Service **MS-0002**

- the indicated price is per year. For more information, see the corresponding maintenance contract
- ATTENTION: No discount is given on this item.**

Recommended miscellaneous



LEG SHOWER^{ATT} Contrast shower for the legs **41 331 979-00**

- 4x WATER BAR concealed body spray** **41 331 979-06**
- 1x electronic control elements (SMART TOOLS)**
- Attention: Only in combination with the Comfort shower.**

Recommended miscellaneous



LEG SHOWER^{ATT} Contrast shower for the legs **35 331 970 90**

- concealed rough parts
- 4x WATER BAR wall installation box**
- 1x concealed rough parts for electronic control elements (SMART TOOLS)**
 - 1x concealed box for pre-wall installation mounting
- 3x xGRID installation tracks incl. connection kit**

dornbracht.com/comfort-shower

eUnit Shower^{ATT}

Sieger Design



eUNIT SHOWER^{ATT} combines the BIG RAIN rain panel with a complete hand shower set and the SMART TOOLS electronic control elements. Experience a pleasant tingling as water falls from the overhead shower onto your face, neck and shoulders. A familiar and relaxing shower experience. The water raining from the body spray envelops your shoulders and upper body, while your head and face stay dry. Breathing freely, you enjoy a therapeutic shower with all of your senses. The VITALIZE Signature Treatment makes an invigorating contrast shower available at the touch of a button. The SMART WATER app is a really easy and convenient way to access more Signature Treatments, such as RELAX – the shower that gets increasingly warmer.

Note

It is obligatory for technical planning, installation and initial commissioning to be accompanied by a certified system partner or by booking a Dornbracht service package.

Detailed product information, appropriate files, dimensioned drawings and 3D objects can be found online at www.dornbracht.com/professional.

41 382 979



eUNIT SHOWER^{ATT} Smart Rain Shower

- exposed trim parts
- 1x BIG RAIN rain panel for ceiling or ceiling substructure installation**

- head spray 200 x 160mm, 99 nozzles
- max. flow 16 l/min
- body spray 360 x 280mm, 142 nozzles
- max. flow 16 l/min

1x complete hand shower set with cover plate

- normal flow
- max. flow 8 l/min

3x eVALVE electronic valve for water temperature and volume adjustment

- automatic scald protection

1x electronic control elements (SMART TOOLS)

- 2x twist-action control elements with electronic control for temperature and volume, each 60 x 60 mm
- 1 x display switch control element with electronic control for water outlet points and scenarios, each 60 x 60 mm

Polished stainless steel / chrome	41 382 979-83
Brushed stainless steel / platinum matt	41 382 979-89



Required miscellaneous

eUNIT SHOWER^{ATT} Smart Rain Shower

35 382 970 90

- concealed rough parts
- 1x concealed rough parts for eVALVE

1x concealed rough parts for electronic control elements (SMART TOOLS)

- 3x concealed box for fitting into pre-wall installation (hole diameter 56 mm) or in bath/basin rim (hole diameter 35 mm), min. recess depth 139 - 164 mm

Required miscellaneous


eUNIT SHOWER^{ATT} Installation support

IS-0004


- Planning advice
- Concealed rough parts support
- Exposed trim parts support
- Commissioning

ATTENTION: No discount is given on this item.

It is obligatory for technical planning, installation and initial commissioning to be accompanied by a certified system partner or by booking a Dornbracht service package



dornbracht.com/eunit-shower

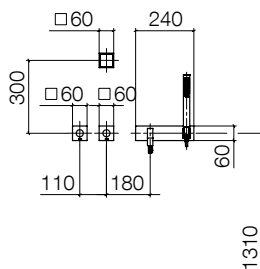

Leg Shower^{ATT}

Sieger Design






The Dornbracht LEG SHOWER^{ATT} is ideal for programmed leg affusions. Four outlet points (WATER BARS) are mounted at calf height and deliver cold (REFRESH) or alternating hot-and-cold (VITALIZE) bursts of water at the touch of a button. The LEG SHOWER^{ATT} is refreshing after sport, for instance, or stimulating, as deliberate changes in temperature help to boost the defences and the immune system.

Note

It is obligatory for technical planning, installation and initial commissioning to be accompanied by a certified system partner or by booking a Dornbracht service package.

Detailed product information, appropriate files, dimensioned drawings and 3D objects can be found online at www.dornbracht.com/professional.

41 333 979

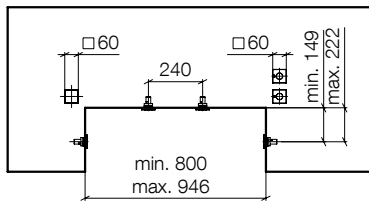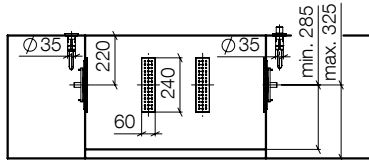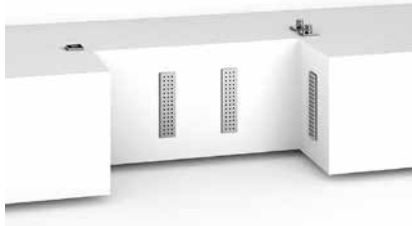

LEG SHOWER^{ATT} Contrast shower for the legs

- exposed trim parts

polished chrome **41 333 979-00**

4x WATER BAR concealed body spray

- rain flow

platinum matt **41 333 979-06**

2x eVALVE electronic valve for water temperature and volume adjustment

- automatic scald protection

1x electronic control elements (SMART TOOLS)

- 2x twist-action control elements with electronic control for temperature and volume, each 60 x 60 mm
- 1 x display switch control element with electronic control for water outlet points and scenarios, each 60 x 60 mm

Attention: Not in combination with the Leg shower.



Required miscellaneous

LEG SHOWER^{ATT} Contrast shower for the legs

35 333 970 90

- concealed rough parts

4x WATER BAR wall installation box

- 1x 1/2" connection angle

1x concealed rough parts for electronic control elements (SMART TOOLS)

- 3x concealed box for fitting into pre-wall installation (hole diameter 56 mm) or in bath/basin rim (hole diameter 35 mm), min. recess depth 139 - 164 mm

3x xGRID installation tracks incl. connection kit

Required miscellaneous

FOOT BATH / LEG SHOWER^{ATT} Installation support

IS-0003

- Planning advice
- Concealed rough parts support
- Exposed trim parts support
- Commissioning

ATTENTION: No discount is given on this item.

It is obligatory for technical planning, installation and initial commissioning to be accompanied by a certified system partner or by booking a Dornbracht service package

Recommended miscellaneous

FOOT BATH / LEG SHOWER^{ATT} Maintenance Service

MS-0003

- regular maintenance by qualified personnel
- updating of the software including introduction to new features
- Increase the lifetime of your system (value preservation)
- **the indicated price is per year. For more information, see the corresponding maintenance contract**

ATTENTION: No discount is given on this item.

dornbracht.com/leg-shower

Foot Bath^{ATT}

Sieger Design



A feeling that flows gradually throughout your whole body. The FOOT BATH^{ATT} combines different jet types, comfort functions and pre-programmed Signature Treatments, the effects of which remain long after the application is finished. The new extending nozzle also offers the opportunity for individual Kneipp showers. The digital SMART TOOLS ensure convenient operation.

Note



It is obligatory for technical planning, installation and initial commissioning to be accompanied by a certified system partner or by booking a Dornbracht service package.

Detailed product information, appropriate files, dimensioned drawings and 3D objects can be found online at www.dornbracht.com/professional.

41 250 979

FOOT BATH^{ATT} Foot Spa

polished chrome	41 250 979-00
platinum matt	41 250 979-06

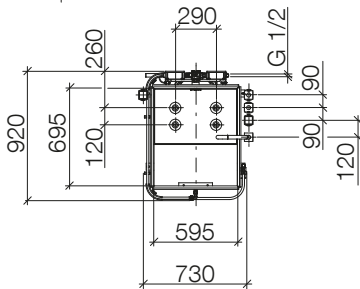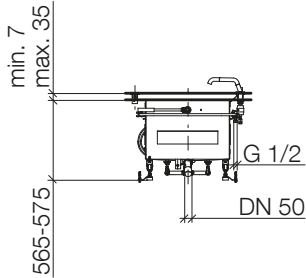

1x foot bath

- undermounted FOOT BATH
- white glazed steel 920 x 750 x 565mm, material thickness 3 mm

1x affusion pipe

- laminar flow

1x WATER FALL with PEARL STREAM

- PEARLSTREAM
- max. flow 8 l/min

1x massage jets

- massage flow
- max. flow 8 l/min

1x electronic pop-up waste and overflow set

1x electronic control elements (SMART TOOLS)

- 2 x display switch control elements with electronic control for water outlet points and scenarios, each 60 x 60 mm
- 2x twist-action control elements with electronic control for temperature and volume, each 60 x 60 mm
- 4x concealed box for fitting into pre-wall installation or in bath/basin rim, hole diameter 35 mm, min. recess depth 139 mm

Required miscellaneous

FOOT BATH / LEG SHOWER^{ATT} Installation support **IS-0003**

- Planning advice
- Concealed rough parts support
- Exposed trim parts support
- Commissioning

ATTENTION: No discount is given on this item.

It is obligatory for technical planning, installation and initial commissioning to be accompanied by a certified system partner or by booking a Dornbracht service package

Recommended miscellaneous

FOOT BATH / LEG SHOWER^{ATT} Maintenance Service **MS-0003**

- regular maintenance by qualified personnel
- updating of the software including introduction to new features
- Increase the lifetime of your system (value preservation)
- **the indicated price is per year. For more information, see the corresponding maintenance contract**

ATTENTION: No discount is given on this item.

dornbracht.com/foot-bath

Online specification

Additional information can be found online.

The Dornbracht Group Professional website shows you the full selection of products for Spa Solutions.

- Simplified product selection
- A quick wish list for the preliminary specification
- Enhanced download functions
- A global search function for all products and documents
- Prompt service contact

Visit us at <https://professional.dornbrachtgroup.com/>

Individual consultation

Dornbracht Regards Awareness As Crucially Important For The Therapeutic And Health-Enhancing Effect Of Water.

This Is Why We Cooperate With Leading Experts, Including Those Involved In Kneipp Therapy And Traditional Chinese Medicine (Tcm).

Our LifeSpa experts offer advice about the variety of ways in which the power of water is a positive influence for a health-conscious lifestyle and will find you a personal, tailor-made wellness solution.

We offer you an individual and expert consultation to answer all your spa & wellness questions.

Do not hesitate to get in touch by phone or e-mail:

+49 (0) 2371 433-0

spa@dornbracht.com

Individualization

	Rain shower	Hand shower		Add-on	
	Without a rain shower	Hand shower set 27818979	Affusion pipe 27838979	With Aquapressure WATERCURVE WATERFAN vertical / horizontal	LEG SHOWER ^{ATT} 41331979 (add-on)
AQUAMOON ^{ATT} 41265979	–	● X	○	○	–
SENSORY SKY ^{ATT} 41260979	–	● X	○	–	–
VERTICAL SHOWER ^{ATT} JUST RAIN wall connection 41282979	○	● X	○	41290979	○
VERTICAL SHOWER ^{ATT} JUST RAIN wall connection 41290979 (Acupressure)	○	● X	○	●	○
VERTICAL SHOWER ^{ATT} JUST RAIN ceiling connection 41283979	○	● X	○	41291979	○
VERTICAL SHOWER ^{ATT} JUST RAIN ceiling connection 41291979 (Acupressure)	○	● X	○	●	○
HORIZONTAL SHOWER ^{ATT} 41287979 / 41288979	–	● X	○	–	–
COMFORT SHOWER ^{ATT} 41321979	○	○	● X	○	○
eUNIT SHOWER ^{ATT} 41382979	–	● X	○	–	–

- standard
- variant, upon request via x-tra Service
- X it is possible to omit the whole component
- not realizable

A technical inspection is required when several variable components are combined. Just some of the many possible variants are shown here. We will gladly advise you should you desire further individualization with regard to products or treatments. Information on prices and delivery times on request.

Additional elements		Control elements		Signature Treatments		
	Cold water mist	Fragrance	A display switch in the shower area / without twist controllers	A display switch / a twist controller in the shower area	Signature Treatment duration: 120 seconds	Signature Treatment duration: 90 seconds
	-	● X	○	○	○	○
	● X	● X	○	○	○	○
	-	-	○	○	○	○
	-	-	○	○	○	○
	-	-	○	○	○	○
	-	-	○	○	○	○
	-	-	○	○	○	○
	-	-	○	○	○	○
	-	-	○	○	○	○

Valid from 01.04.2020
Errors and omissions excepted.

Installation supervision and maintenance contract

Installation supervision for your Spa Solutions includes the following services:

- Professional planning support for fitters, electricians and system integrators
- Checking all parameters prescribed by Dornbracht
- Expert supervision of rough installation and final assembly
- Introduction to operation and explanation of product features
- System configuration and parameterisation
- A checklist is used to document all the relevant test points

With installation supervision, you secure for yourself the following customer advantages:

- Professional planning advice on site, with a qualified Dornbracht service technician
- Direct support from Dornbracht, or from qualified personnel trained by Dornbracht
- Optimum supervision from technicians experienced in dealing with the installation of high-end spa solutions
- Optimum system performance, because compliance with the required operating conditions and parameterisation is ensured, in accordance with the existing infrastructure

Installation supervision packages:

IS-0001	Installation supervision for	Sensory Sky ^{ATT} / Aquamoon ^{ATT}
IS-0002	Installation supervision for	Horizontal Shower ^{ATT} / Vertical Shower ^{ATT} / Comfort Shower ^{ATT}
IS-0003	Installation supervision for	Foot Bath ^{ATT} / Leg Shower ^{ATT}
IS-0004	Installation supervision for	eUnit Shower ^{ATT}
IS-0007	Installation supervision for	Aquamoon / Rainmoon



The maintenance contract for your Spa Solutions includes the following services:

- Checking the water input parameters for the system
- Mechanical and electronic testing of all components supplied by Dornbracht
- Filter cleaning, replacing these components when required (included in the maintenance price)
- Keeping the software up to date free of charge
- Optimising and adapting the parameters necessary for perfect operation, the opportunity for individual, personalised adjustment
- A comprehensive test run to ensure functionality in all the available modes / Signature Treatments
- After prior consultation, other materials can be replaced as necessary (a separate charge is made)
- The opportunity to upgrade the maintenance for additional Dornbracht products in your property
- A checklist is used to document all the relevant test points

With a maintenance contract, you secure for yourself the following customer advantages:

- An agreed, regular visit from our qualified Dornbracht technician
- Extremely safe and reliable system operation, thanks to preventive maintenance
- The risk of your system not working is minimised
- The system does not get dirty
- Regular maintenance increases the lifetime of your system (value preservation)
- Your system always has up-to-date software versions and the latest features, including personal instruction in new functionalities
- Exclusive VIP customer access to our Contact Centre

Maintenance services:

MS-0001	Maintenance service for	Sensory Sky ^{ATT} / Aquamoon ^{ATT}
MS-0002	Maintenance service for	Horizontal Shower ^{ATT} / Vertical Shower ^{ATT} / Comfort Shower ^{ATT}
MS-0003	Maintenance service for	Foot Bath ^{ATT} / Leg Shower ^{ATT}
MS-0007	Maintenance service for	Aquamoon / Rainmoon

Smart Set Shower

Sieger Design



Note

It is recommended for technical planning, installation and initial commissioning to be accompanied by a certified system partner or by booking a Dornbracht service package.

Detailed product information, appropriate files, dimensioned drawings and 3D objects can be found online at www.dornbracht.com/professional.

42 760 979



SMART TOOLS Electronic control elements

- 2x twist-action control elements with electronic control for temperature and volume, each 60 x 60 mm
- 1x display switch control element with electronic control 60 x 60mm
- 3x concealed box for fitting into pre-wall installation (hole diameter 56 mm) or in bath/basin rim (hole diameter 35 mm), min. recess depth 139 - 164 mm

polished chrome	42 760 979-00
platinum matt	42 760 979-06
platinum	42 760 979-08

35 026 970



eSET Shower for 2 outlet points

- ready-to-use control unit for DIN rail mounting TS 35, (120mm x 135mm x 60mm)
- 2x eVALVE electronic valve for water temperature and volume adjustment
- 2x concealed rough parts for eVALVE
- power supply unit 100 - 240 V AC / 12 V DC, 50 - 60 Hz, 60 W
- 2x strainer
- 2x stop valve

Concealed rough parts	35 026 970 90
-----------------------	---------------

28 765 979



Rain shower with wall fixing

- 450 mm projection
- rain flow
- with anti-scale system
- rain shower 300 x 240mm
- rosette 60 x 120 mm
- 1/2" connection

polished chrome	28 765 979-00
platinum matt	28 765 979-06
platinum	28 765 979-08

28 775 979



Rain shower with ceiling fixing

- rain flow
- with anti-scale system
- rain shower 300 x 240mm
- distance between ceiling and lower edge of the shower 165mm
- rosette 60 x 120, as required
- 1/2" connection

polished chrome	28 775 979-00
platinum matt	28 775 979-06
platinum	28 775 979-08

41 550 979



JUST RAIN Rain shower with wall fixing

- rain shower 590 x 360mm
- 1/2" connection
- pre-fitted stainless steel enclosure
- with anti-scale system

technical data:

- minimum flow: 17 l/min
- flow at 3bar flow pressure in conjunction with xTOOL: 24,5/ min
- minimum flow pressure 2 bar
- max. flow pressure 4 bar
- weight 11kg

technical data:

plumbing:

- for choosing the drainage, taking into consideration the discharge of all the products in the shower, the specific demand needs to be assessed. Recommendation: Floor drain (connected rating) = 1.5l/sec, drainage rate DN 70


In combination with an eValve, the flow rate can deviate.

Fits MEM, CL.1, Symetrics, IMO, Meta, Tara., VAIA, LULU, Lisse

Please note that for an electronic version the flow limiter must be removed.

polished high-grade steel	41 550 979-85
matt high-grade steel	41 550 979-86

41 507 979



JUST RAIN Rain shower with ceiling fixing

- rain shower 400 x 320mm
- 1/2" connection
- pre-fitted stainless steel enclosure
- with anti-scale system

technical data:

- minimum flow: 17 l/min
- flow at 3bar flow pressure in conjunction with xTOOL: 24,5l/min
- minimum flow pressure 2 bar
- max. flow pressure 4 bar
- weight 7kg

technical data:

plumbing:

- for choosing the drainage, taking into consideration the discharge of all the products in the shower, the specific demand needs to be assessed. Recommendation: Floor drain (connected rating) = 1.5l/sec, drainage rate DN 70

In combination with an eValve, the flow rate can deviate.

Fits MEM, CL.1, Symetrics, IMO, Meta, Tara., VAIA, LULU, Lisse

Please note that for an electronic version the flow limiter must be removed.

polished high-grade steel	41 507 979-85
matt high-grade steel	41 507 979-86

13 415 979



WATER SHEET Cascade spout for wall mounting

- 150 mm projection
- cascade
- cover plate 240 x 60 mm
- 1/2" connection
- plug-link mounting
- max. flow 26.5 l/min at 3 bar flow pressure


In combination with an eValve, the flow rate can deviate.

Please note that for an electronic version the flow limiter must be removed.

Fits MEM, CL.1, Symetrics, IMO

polished chrome	13 415 979-00
platinum matt	13 415 979-06
platinum	13 415 979-08
matt black	13 415 979-33

Recommended miscellaneous



Concealed wall elbow

- min. recess depth 90 mm
- max. recess depth 163 mm

In combination with the electronic version, concealed part is not required.

Concealed rough parts	35 085 970 90
-----------------------	---------------

13 425 979



WATER FALL Cascade spout with individual jets for wall mounting

- 22 mm projection
- PEARLSTREAM
- plate 240 mm x 60 mm
- connection 1/2", for shortening
- plug-link mounting
- max. flow 9.5 l/min


In combination with an eValve, the flow rate can deviate.

Please note that for an electronic version the flow limiter must be removed.

Fits MEM, CL.1, Symetrics, IMO

polished chrome	13 425 979-00
platinum matt	13 425 979-06
platinum	13 425 979-08
matt black	13 425 979-33

Recommended miscellaneous



Concealed wall elbow

- min. recess depth 90 mm
- max. recess depth 163 mm

In combination with the electronic version, concealed part is not required.

Concealed rough parts	35 085 970 90
-----------------------	---------------

27 818 979



Hand shower set with cover plate


- normal flow
- with anti-scale system
- 3/8" shower outlet
- cover plate 240 x 60 mm
- metal shower hose 1250mm with integrated anti-twist protection
- 1/2" wall elbow
- max. flow 7.6 l/min

Intrinsic protection against back flow.

In combination with an eValve, the flow rate can deviate.

Please note that for an electronic version the flow limiter must be removed.

polished chrome	27 818 979-00
platinum matt	27 818 979-06
platinum	27 818 979-08



Recommended miscellaneous

Concealed wall elbow

- min. recess depth 90 mm
- max. recess depth 163 mm

Concealed rough parts	35 085 970 90
-----------------------	----------------------

27 838 979



Affusion pipe with cover plate

- laminar flow
- 3/8" shower outlet
- cover plate 240 x 60 mm
- metal shower hose 1250mm with integrated anti-twist protection
- 1/2" connection
- plug-link mounting
- max. flow 9.5 l/min


Intrinsic protection against back flow.

In combination with an eValve, the flow rate can deviate.

Please note that for an electronic version the flow limiter must be removed.

Fits MEM, CL.1, Symetrics, IMO

polished chrome	27 838 979-00
platinum matt	27 838 979-06
platinum	27 838 979-08



Recommended miscellaneous

Concealed wall elbow

- min. recess depth 90 mm
- max. recess depth 163 mm

Concealed rough parts	35 085 970 90
-----------------------	----------------------

Smart Set Bath

Sieger Design



Note

It is recommended for technical planning, installation and initial commissioning to be accompanied by a certified system partner or by booking a Dornbracht service package.

Detailed product information, appropriate files, dimensioned drawings and 3D objects can be found online at www.dornbracht.com/professional.

42 760 979



SMART TOOLS Electronic control elements

- 2x twist-action control elements with electronic control for temperature and volume, each 60 x 60 mm
- 1x display switch control element with electronic control 60 x 60mm
- 3x concealed box for fitting into pre-wall installation (hole diameter 56 mm) or in bath/basin rim (hole diameter 35 mm), min. recess depth 139 - 164 mm

polished chrome	42 760 979-00
platinum matt	42 760 979-06
platinum	42 760 979-08

35 025 970



eSET Bath for 2 outlet points

- ready-to-use control and valve unit for wall mounting incl. 1 x eVALVE electronic valve for water temperature and volume adjustment and electronic, two-way diverter (240mm x 270mm x 60mm)
- electronic pop-up waste and overflow set
- 2x 1/2"IG x 1/2"IG x 400mm high pressure hose
- power supply unit 100 - 240 V AC / 12 V DC, 50 - 60 Hz, 60 W
- 2x angle valve with filter 1/2"

technical data:

Detailed planning information and technical data can be found at www.dornbracht.com/professional

polished chrome	35 025 970-00
platinum matt	35 025 970-06
platinum	35 025 970-08

13 612 705



bath spout without diverter for deck mounting

- **200 mm projection**
- rectangular spray pattern with 55 individual jets
- height of mixer 125 mm
- height up to aerator 108 mm
- hole diameter 35 mm
- 1/2" connection
- max. flow 24.6 l/min at 3 bar flow pressure

In combination with an eValve, the flow rate can deviate. Please note that for an electronic version the flow limiter must be removed.

polished chrome	13 612 705-00
platinum matt	13 612 705-06

13 630 740



Bath cascade spout without diverter for deck mounting

- **235 mm projection**
- cascade
- height of mixer 100 mm
- height up to aerator 80 mm
- hole diameter 32 mm
- 1/2" connection
- max. flow 26.5 l/min at 3 bar flow pressure

In combination with an eValve, the flow rate can deviate. Please note that for an electronic version the flow limiter must be removed.

polished chrome	13 630 740-00
platinum matt	13 630 740-06
matt black	13 630 740-33

13 801 705




bath spout for wall mounting

- **205 mm projection**
- rectangular spray pattern with 55 individual jets
- hole diameter 37 mm
- 1/2" connection
- plug-link mounting
- max. flow 24.6 l/min at 3 bar flow pressure

In combination with an eValve, the flow rate can deviate. Please note that for an electronic version the flow limiter must be removed.

polished chrome	13 801 705-00
platinum matt	13 801 705-06



Recommended miscellaneous

Concealed wall elbow

- min. recess depth 90 mm
- max. recess depth 163 mm

Concealed rough parts	35 085 970 90
-----------------------	---------------

13 430 740


**Bath cascade spout for wall mounting**

- 200 mm projection
- cascade
- plate 180 mm x 60 mm
- hole diameter 40 mm
- 1/2" connection
- plug-link mounting
- max. flow 26.5 l/min at 3 bar flow pressure

**In combination with an eValve, the flow rate can deviate.
Please note that for an electronic version the flow limiter
must be removed.**

polished chrome	13 430 740-00
platinum matt	13 430 740-06
matt black	13 430 740-33

Recommended miscellaneous

**Concealed wall elbow**

- min. recess depth 90 mm
- max. recess depth 163 mm

Concealed rough parts 35 085 970 90

13 801 782


**bath spout for wall mounting**

- 220 mm projection
- rectangular, air-enriched flow
- rosette 60 x 60 mm
- hole diameter 37 mm
- 1/2" connection
- max. flow 38.5 l/min at 3 bar flow pressure

**In combination with an eValve, the flow rate can deviate.
Please note that for an electronic version the flow limiter
must be removed.**

polished chrome	13 801 782-00
platinum matt	13 801 782-06
platinum	13 801 782-08

Recommended miscellaneous

**Concealed wall elbow**

- min. recess depth 90 mm
- max. recess depth 163 mm

Concealed rough parts 35 085 970 90

13 415 979

**WATER SHEET Cascade spout for wall mounting**


- 150 mm projection
- cascade
- cover plate 240 x 60 mm
- 1/2" connection
- plug-link mounting
- max. flow 26.5 l/min at 3 bar flow pressure

**In combination with an eValve, the flow rate can deviate.
Please note that for an electronic version the flow limiter
must be removed.**

Fits MEM, CL.1, Symetrics, IMO

polished chrome	13 415 979-00
platinum matt	13 415 979-06
platinum	13 415 979-08
matt black	13 415 979-33

Recommended miscellaneous

**Concealed wall elbow**

- min. recess depth 90 mm
- max. recess depth 163 mm

**In combination with the electronic version,
concealed part is not required.**

Concealed rough parts 35 085 970 90

27 702 980

**Hand shower set for bath rim or tile edge installation**

- normal flow
- with anti-scale system
- rosette 60 x 60 mm
- hole diameter 32 mm
- metal shower hose 2250mm with integrated anti-twist protection
- max. flow 6.8 l/min

**Two-piece design allows hose to later be changed without
dismantling the fitting.**

Intrinsic protection against back flow.

polished chrome	27 702 980-00
platinum matt	27 702 980-06
platinum	27 702 980-08
matt black	27 702 980-33

27 728 972



Affusion pipe

- 220 mm projection
- pivotable spout 160°
- laminar flow
- height of mixer 110 mm
- height up to water outlet point 67 mm
- hole diameter 35 mm
- **rosette 60 x 60 mm**
- max. flow 9.5 l/min at 3 bar flow pressure
- lead-free

In combination with an eValve, the flow rate can deviate.

Please note that for an electronic version the flow limiter must be removed.

polished chrome	27 728 972-00
platinum matt	27 728 972-06
platinum	27 728 972-08



Product alternative

Affusion pipe

- rosette Ø 60 mm
- max. flow 9.5 l/min

polished chrome	27 728 971-00
platinum matt	27 728 971-06
platinum	27 728 971-08



Product alternative

Affusion pipe

- without rosette
- max. flow 9.5 l/min

An accurately stepped hole is required for installation and must be prepared in advance by the stonemason or contractor.

Waterproof materials are essential for installation.

The dimensions for the stepped hole can be found at www.dornbracht.com/professional

polished chrome	27 728 973-00
platinum matt	27 728 973-06
platinum	27 728 973-08



Recommended miscellaneous

Pipe and weight for mounting on the shaft

polished chrome	12 510 970-00
platinum matt	12 510 970-06
platinum	12 510 970-08

27 838 979



Affusion pipe with cover plate

- laminar flow
- 3/8" shower outlet
- cover plate 240 x 60 mm
- metal shower hose 1250mm with integrated anti-twist protection
- 1/2" connection
- plug-link mounting
- max. flow 9.5 l/min


Intrinsic protection against back flow.

In combination with an eValve, the flow rate can deviate.

Please note that for an electronic version the flow limiter must be removed.

Fits MEM, CL.1, Symetrics, IMO

polished chrome	27 838 979-00
platinum matt	27 838 979-06
platinum	27 838 979-08



Recommended miscellaneous

Concealed wall elbow

- min. recess depth 90 mm
- max. recess depth 163 mm

Concealed rough parts	35 085 970 90
-----------------------	---------------

27 818 979

Hand shower set with cover plate

- normal flow
- with anti-scale system
- 3/8" shower outlet
- cover plate 240 x 60 mm
- metal shower hose 1250mm with integrated anti-twist protection
- 1/2" wall elbow
- max. flow 7.6 l/min

Intrinsic protection against back flow.


In combination with an eValve, the flow rate can deviate.

Please note that for an electronic version the flow limiter must be removed.



polished chrome	27 818 979-00
platinum matt	27 818 979-06
platinum	27 818 979-08

Recommended miscellaneous



Concealed wall elbow

- min. recess depth 90 mm
- max. recess depth 163 mm

Concealed rough parts	35 085 970 90
-----------------------	---------------

Smart Set Basin

Sieger Design



Note

It is recommended for technical planning, installation and initial commissioning to be accompanied by a certified system partner or by booking a Dornbracht service package.

Detailed product information, appropriate files, dimensioned drawings and 3D objects can be found online at www.dornbracht.com/professional.

42 760 979



SMART TOOLS Electronic control elements

- 2x twist-action control elements with electronic control for temperature and volume, each 60 x 60 mm
- 1x display switch control element with electronic control 60 x 60mm
- 3x concealed box for fitting into pre-wall installation (hole diameter 56 mm) or in bath/basin rim (hole diameter 35 mm), min. recess depth 139 - 164 mm

polished chrome	42 760 979-00
platinum matt	42 760 979-06
platinum	42 760 979-08

35 022 970



eSET Basin for 1 outlet point

- ready-to-use control unit for wall mounting incl. 1 x eVALVE electronic valve for water temperature and volume adjustment, (240mm x 135mm x 60mm)
- 2x 1/2"IG x 1/2"IG x 400mm high pressure hose
- 100-240 V AC / 12 V DC, 50-60 Hz, 18 W power supply unit, incl. country-specific adapter set
- 2x angle valve with filter 1/2"

Concealed rough parts	35 022 970 90
-----------------------	---------------

13 714 705



Deck-mounted basin spout without pop-up waste

- 160 mm projection
- fixed spout
- rectangular spray pattern with 40 individual jets
- height of mixer 108 mm
- height up to aerator 94 mm
- hole diameter 35 mm
- 2x screw-in M 10 x 1 pressure hose, leak-tested
- 1/2" connection
- max. flow 4 l/min
- lead-free

In combination with an eValve, the flow rate can deviate.

Please note that for an electronic version the flow limiter must be removed.

polished chrome	13 714 705-00
platinum matt	13 714 705-06

13 715 705



Deck-mounted basin spout without pop-up waste

- 160 mm projection
- fixed spout
- rectangular spray pattern with 40 individual jets
- height of mixer 204 mm
- height up to aerator 190 mm
- hole diameter 35 mm
- 2x screw-in M 10 x 1 pressure hose, leak-tested
- 1/2" connection
- max. flow 4 l/min
- lead-free

In combination with an eValve, the flow rate can deviate.

Please note that for an electronic version the flow limiter must be removed.

polished chrome	13 715 705-00
platinum matt	13 715 705-06

13 717 705



Deck-mounted basin spout without pop-up waste

- 200 mm projection
- fixed spout
- rectangular spray pattern with 40 individual jets
- height of mixer 343 mm
- height up to aerator 329 mm
- hole diameter 35 mm
- max. flow 4 l/min
- 1/2" connection
- 2x screw-in M 10 x 1 pressure hose, leak-tested
- lead-free

In combination with an eValve, the flow rate can deviate.

Please note that for an electronic version the flow limiter must be removed.

polished chrome	13 717 705-00
platinum matt	13 717 705-06

13 710 740



Deck-mounted basin spout with pop-up waste

- **110 mm projection**
- fixed spout
- PEARLSTREAM
- height of mixer 30 mm
- height up to aerator 15 mm
- hole diameter 35 mm
- 2x screw-in M 10 x 1 pressure hose, leak-tested
- 1/2" connection
- max. flow 5 l/min
- lead-free

Only suitable for basins with an overflow.

In combination with an eValve, the flow rate can deviate.

Please note that for an electronic version the flow limiter must be removed.

polished chrome	13 710 740-00
platinum matt	13 710 740-06

13 721 980



Deck-mounted basin spout without pop-up waste

- **165 mm projection**
- fixed spout
- circular, air-enriched flow
- height of mixer 230 mm
- height up to aerator 205 mm
- hole diameter 35 mm
- rosette 60 x 60 mm
- 2x screw-in M 10 x 1 pressure hose, leak-tested
- 1/2" connection
- max. flow 7 l/min
- lead-free

In combination with an eValve, the flow rate can deviate.

Please note that for an electronic version the flow limiter must be removed.

polished chrome	13 721 980-00
platinum matt	13 721 980-06

13 715 782



Deck-mounted basin spout with pop-up waste

- **200 mm projection**
- fixed spout
- rectangular, air-enriched flow
- height of mixer 310 mm
- height up to aerator 190 mm
- hole diameter 35 mm
- 2x screw-in M 10 x 1 pressure hose, leak-tested
- rosette 60 x 60 mm
- max. flow 5.7 l/min
- lead-free

Only suitable for basins with an overflow.

In combination with an eValve, the flow rate can deviate.

Please note that for an electronic version the flow limiter must be removed.

polished chrome	13 715 782-00
platinum matt	13 715 782-06
platinum	13 715 782-08



Product alternative

Deck-mounted basin spout without pop-up waste

- **without pop-up waste**

polished chrome	13 716 782-00
platinum matt	13 716 782-06
platinum	13 716 782-08

Aloys F. Dornbracht GmbH & Co. KG Armaturenfabrik
Köbbingser Mühle 6
D-58640 Iserlohn
Phone +49 (0) 2371 433-460
Fax +49 (0) 2371 433-135
mail@dornbrachtgroup.de
dornbracht.com

Dornbracht Group
Premium Solutions for Interior Architecture