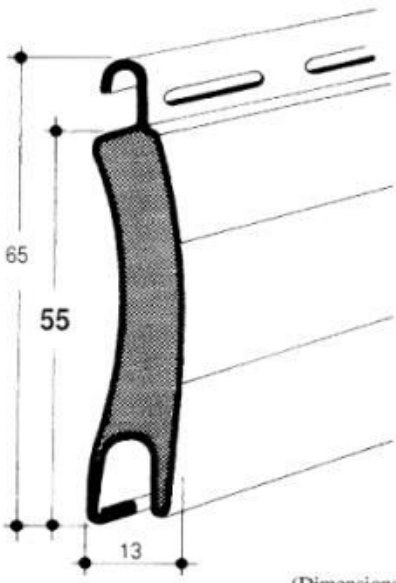


DRAWING	DESCRIPTION
 <p>(Dimensions are in mm)</p>	<p>FOLDA ROLLING SHUTTERS provide excellent sound and heat insulation. They are extremely light in weight and noiseless in use.</p> <p>The surface is pre-painted with Polyamide and hence extremely resistant to abrasion. They do not need maintenance and are long lasting.</p> <p>Inside they are filled with Polyurethane foam CFC-free, High density (300Kg/m³) achieving high sound and heat resistance.</p>

THICKNESS

+ STANDARD	[0.30, 0.31] mm
+ EXTRA	[0.33, 0.34] mm

RECOMMENDED DIMENSION FOR ASSEMBLY

Maximum Area	14 m ²
Maximum Width	4.5 m
Maximum Height	3.4 m
Approximate Weight	5.4 Kg/m ²
Minimum Diameter of axle-tree	65 mm

DIAMETERS AFTER ROLL UP (cm)

HEIGHT (cm)	100	140	180	220	260	300	340
AXE Φ70	16.0	17.4	19.4	20.6	22.5	24.1	25.0
AXE Φ89	16.5	18.5	19.9	21.9	23.2	24.5	25.4