

EDGES
WARMING YOUR STYLISH LIVING



GENUS

X



BOILER


GENUS X



Wall-hung compact boiler with AUTO function



- Very high efficiency (up to 93,6%, 24FF)
- BusBridgeNet® communication protocol
- Ariston Net ready for - Ariston Net embedded
- Best materials available to guarantee high reliability and very long lifecycle
- "Anti-freezing systems preventing freezing and scale accumulation
- With its IPX5D, the protection, against water jet streams (only FF version)
- Best enjoyable design of its category
- High resolution LCD display with full text, touch interface and intuitive menu
- Ready to be used with renewable sources for hot water production
- Very good acoustic comfort thanks to the new optimized silence
- Boiler protection from water impurities accumulation
- "AUTO function" constant temperature for the maximum thermic comfort
- "Comfort Function" instantaneous hot water, for 30', after first withdrawal, reducing waiting times

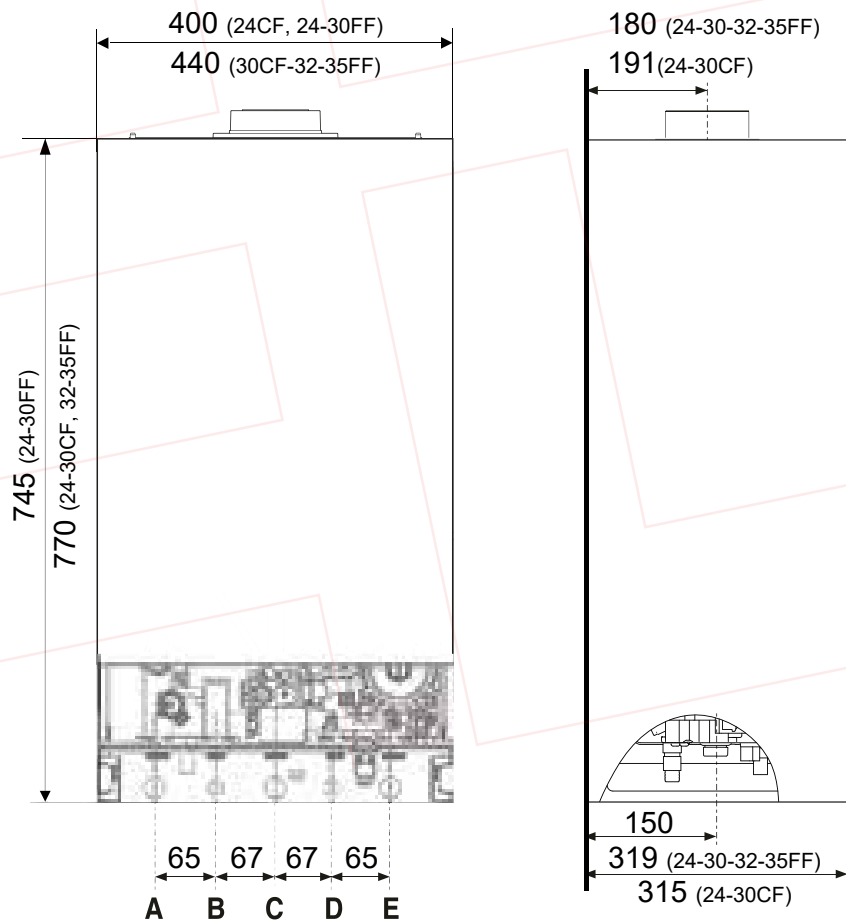CARES X




LEGEND

- Central Heating Flow
- Domestic Hot Water Outlet
- Gas Inlet
- Domestic Cold Water Inlet
- Central Heating Return


GENUS X	18 CF	24 CF
ENERGY SAVING	Up to 13%*	
POWER RANGE	Combi FF 24-28-15 kW CF 15-24 kW	System FF 24 kW CF 24 kW
EFFICIENCY	Up to 93,6%	
CONNECTIVITY		
DISPLAY	Large LCD Display	
SILENCE	-	
COMFORT FUNCTION		
DESIGN	Compact structure, 745 x 400 x 315 mm	Dimensions (H x L x W) Italian design.
INTEGRATION WITH OTHER PRODUCTS	BusBridgeNetR technology ready	

ITALIAN
DESIGNAUTO
FUNCTIONCOMFORT
FUNCTIONSMART
MENUEASY
INSTALLATIONEASY
MAINTENANCESYSTEM
MANAGEMENTCOMPACT
SIZE


Graph of boiler's residual head

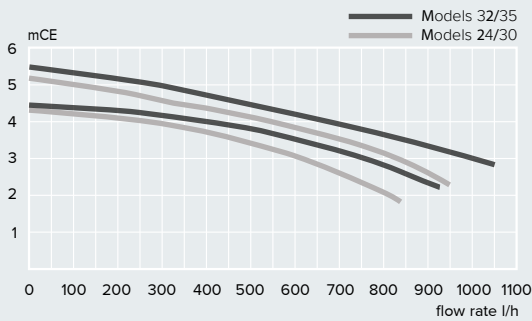

CF Version - Natural draught




FF Versions - Coaxial exhaust

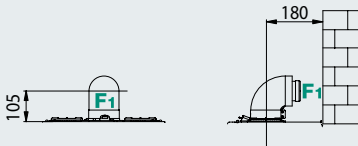

Ø60/100: up to 4m (24-28 kW) - 2m (32-35 kW)
 Ø80/125: up to 11m (24-28 kW) - 8 m (32 kW) - 7 m (35 kW)

FF Versions - Twin pipe exhaust

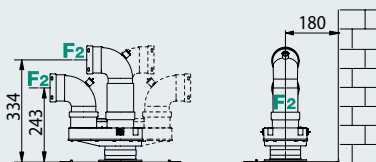

Ø80/80: up to 45m (24kW) - 50m (28kW) - 33m (32 kW) -
 33m (35 kW)

TECHNICAL DATA

24 CF 30 CF 24 FF 30 FF 32 FF 35 FF

POWER SPECIFICATIONS

Max/min nominal heat input(Hi)	kW	25,8/11,0	29,5/13,0	25,8/11,0	30,0/13,0	32,5/15,0	34,5/15,0
Max/min nominal heat input (Hs)	kW	28,7/12,2	32,8/14,4	28,7/12,2	33,3/14,4	36,1/16,7	38,3/16,7
Max/min nominal heat input for hot water (Hi)	kW	27,0/11,0	30,5/13,0	25,8/11,0	30,0/13,0	34,5/15,0	34,5/15,0
Max/min nominal heat input for hot water (Hs)	kW	30,0/12,2	33,9/14,4	28,7/12,2	33,3/14,4	38,3/16,7	38,3/16,7
Heat output: max/min	kW	23,7/9,9	26,5/11,2	24,0/9,5	28,1/11,6	29,6/12,8	32,3/13,2
D.H.W. Heat output: max/min	kW	25,0/10,2	27,9/11,9	23,6/10,0	27,4/11,9	32,2/14,0	32,2/14,0
Combustion efficiency (of flue gas)	%	92,7	92,8	93,7	93,8	93,1	93,9
Gross efficiency of nominal heat input (60/80 °C) Hi/Hs	%	91,9/82,8	89,9/81,0	93,1/83,8	93,6/84,3	91,1/82,0	93,6/84,3
Gross efficiency at 30 % at 47°C Hi/Hs	%	91,2/82,1	89,7/80,8	93,3/84,0	93,7/84,4	89,8/80,9	92,6/83,4
Gross efficiency at minimum power Hi/Hs	%	90,2/81,2	86,5/77,9	86,7/78,1	93,7/84,4	85,0/76,5	88,2/79,4
Number of efficiency stars (Directive 92/42/EEC)	stars						
Ma. heat loss to the casing (ΔT = 50°C)	%	0,8	2,9	0,6	0,2	2	0,3
Heat loss through the flue when burner on	%	7,3	7,2	6,3	6,2	6,9	6,1
Heat loss through the flue when burner off	%	0,4	0,4	0,4	0,4	0,4	0,4

EMISSIONS

Residual discharge head	Pa	-	-	120	145	130	130
Minimum draw	Pa	4,1	4,3	-	-	-	-
Nox class	class	2	2	3	3	3	3
Flue fumes temperature (G20)	°C	116	125	117	110	125	112
CO ₂ content ₂ (G20)	%	5,4	6,1	6,5	6,1	6,4	6,4
CO content (O %O ₂)	ppm	54	44	60	111	141	159
O ₂ content ₂ (G20)	%	10,8	9,5	8,8	9,5	9	9
Max capacity fumes (G20)	kg/h	67,2	70,2	56,9	71,2	77,2	77,2
Excess air	%	105	83	72	83	75	75

HEATING CIRCUIT

Expansion vessel pre-charged pressure	Mpa (bar)	0,1 (1)	0,1 (1)	0,1 (1)	0,1 (1)	0,1 (1)	0,1 (1)
Maximum central heating circuit pressure	Mpa (bar)	0,3 (3)	0,3 (3)	0,3 (3)	0,3 (3)	0,3 (3)	0,3 (3)
Expansion vessel capacity	l	8	8	8	8	8	8
Central heating temperature: max/min	°C	82/35	82/35	82/35	82/35	82/35	82/35

DOMESTIC HOT WATER CIRCUIT

Domestic hot water temperature max/min	°C	60/36	60/36	60/36	60/36	60/36	60/36
Specific flow rate of domestic hot water system (10 min. with ΔT=30°C) instant boilers	l/min	11,8	13,2	11,2	13,2	15,1	15,1
D.H.W. flow rate ΔT=25°C	l/min	14,3	16	13,5	15,7	18,5	18,5
D.H.W. flow rate ΔT=35°C	l/min	10,2	11,4	9,6	11,2	13,2	13,2
Hot water comfort stars (EN13203)	stars						
D.H.W. minimum flow rate	l/min	<2	<2	1,7	1,7	1,7	1,7
Domestic hot water pressure max/min	Mpa (bar)	0,7/0,1 (7/1)	0,7/0,1 (7/1)	0,7/0,1 (7/1)	0,7/0,1 (7/1)	0,7/0,1 (7/1)	0,7/0,1 (7/1)

ELECTRICAL

Power supply voltage/frequency	V/Hz	220/50	220/50	220/50	220/50	220/50	220/50
Power consumption	W	50	50	84	101	101	101
Minimum operating room temperature	°C	5	5	5	5	5	5
Electric system grades of protection	IP	X5D	X5D	X5D	X5D	X5D	X5D
Weight	kg	27	28	31	32	30	31

CODE

3300850 3300852 3300851 3300853 3300854 3300855



+2 0110 177 7751

www.EdgesHeating.com

Info@solaredges.com

2 Ext 26 July St . Lebnan Sq .

El Hawary Tower , Mohandessin

Giza 12654 - Egypt



@EdgesSolar



@Edges Heating Systems & Solar Energy