


# Product data sheet

Specifications

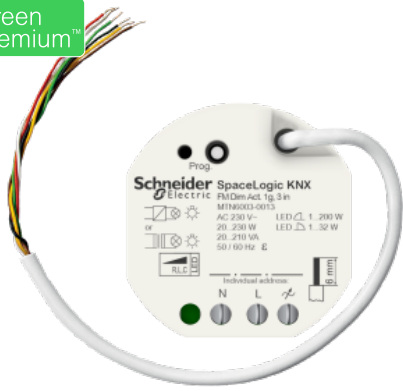

## Dimming actuator, SpaceLogic KNX, Universal, flush mounted, 3 binary inputs, KNX Secure

MTN6003-0013

### Main

Range of product	SpaceLogic KNX
Product or component type	Dimming actuator
Operating mode	KNX bus system
Bus type	KNX

### Complementary

Mounting support	Flush
[Ue] rated operational voltage	230 V
Network frequency	50/60 Hz
Current consumption	5...18 mA for bus
Input type	3 x binary AC
Number of outputs	1
Load type	Incandescent lamps: 20...230 W at 230 V AC High voltage halogen lamp: 20...210 W at 230 V AC LV halogen lamps: 20...210 W at 230 V AC (inductive transformer) LV halogen lamps: 20...210 W at 230 V AC (capacitive transformer) LED lamp: 1...200 W at 230 V AC (phase cut-off) LED lamp: 1...32 W at 230 V AC (phase cut-on)
Maximum cable length	10 m for input
Width	48 mm
Height	50 mm
Depth	28 mm

### Environment

IP degree of protection	IP20
Ambient air temperature for operation	-5...45 °C

### Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	6.5 cm
Package 1 Width	7.6 cm

Package 1 Length	7.6 cm
Package 1 Weight	106.0 g
Unit Type of Package 2	S03
Number of Units in Package 2	60
Package 2 Height	30 cm
Package 2 Width	30 cm
Package 2 Length	40 cm
Package 2 Weight	6.875 kg
Package 3 Height	30 cm

## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
China RoHS Regulation	<a href="#">China RoHS declaration</a> Pro-active China RoHS declaration (out of China RoHS legal scope)
RoHS exemption information	<a href="#">Yes</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End of Life Information</a>

## Contractual warranty

Warranty	18 months
----------	-----------

## Recommended replacement(s)